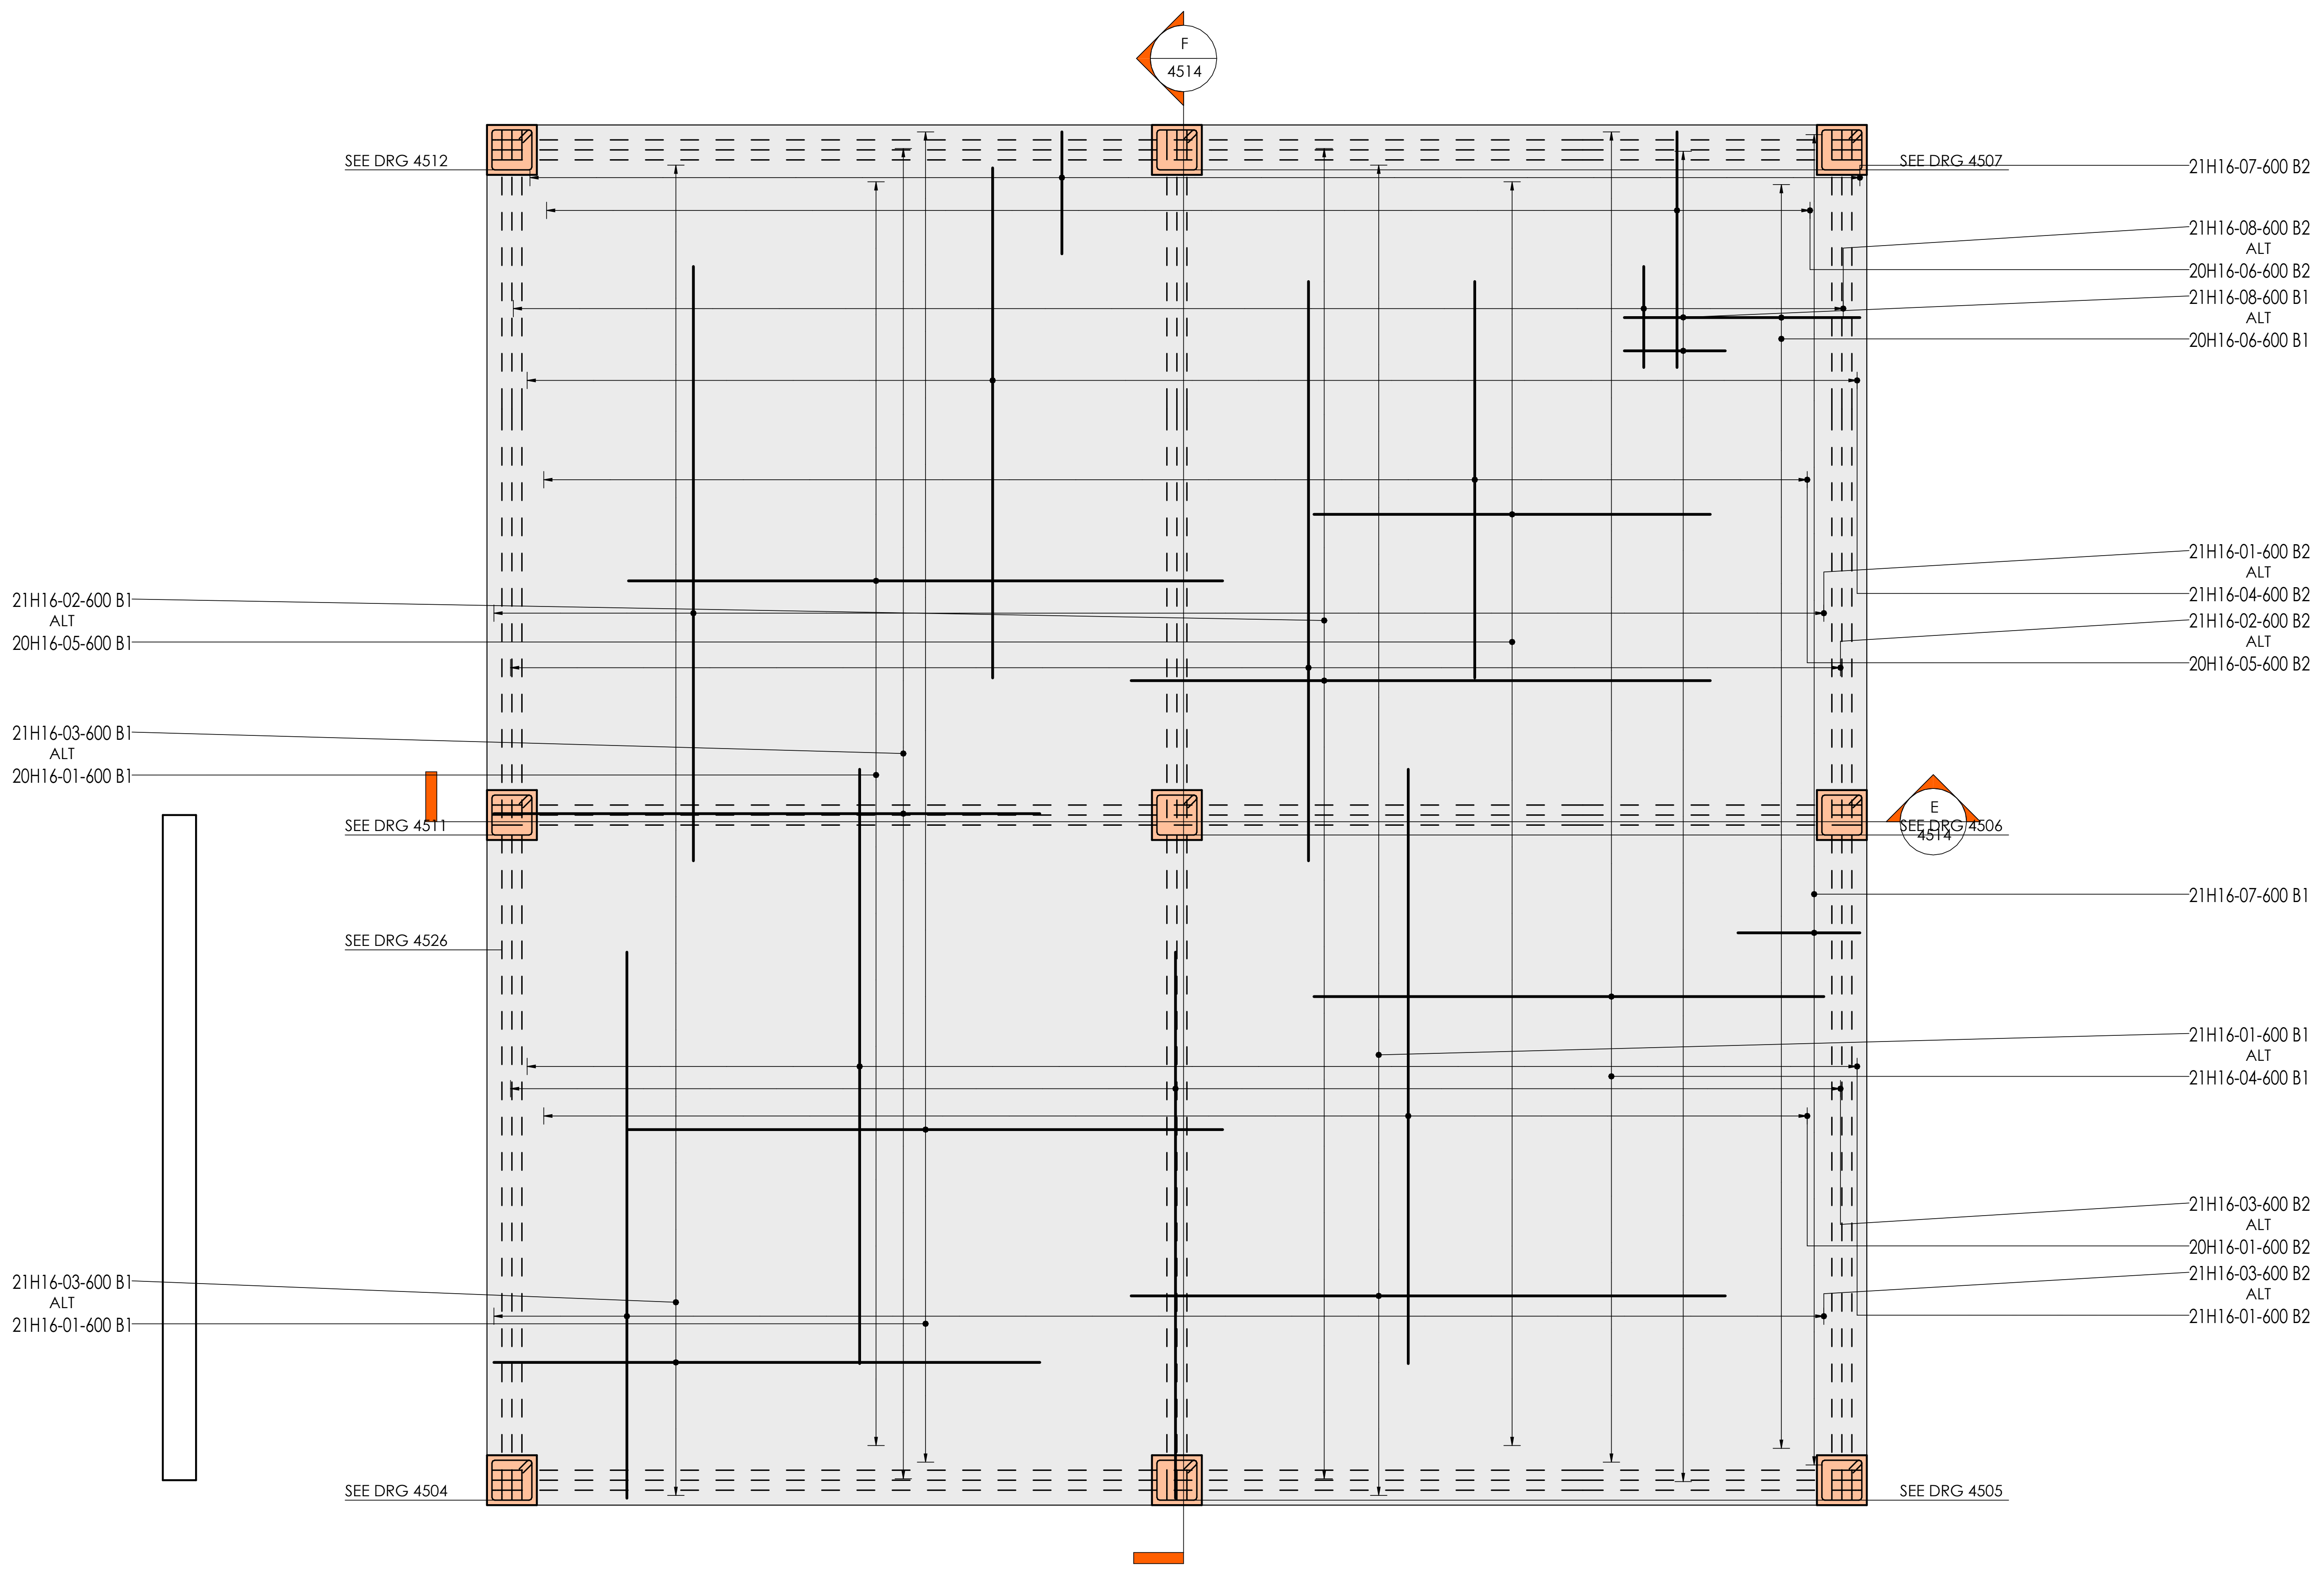
F
4514
SEE DRG 4512
SEE DRG 4507
21H16-07-600 B2
21H16-08-600 B2
ALT
20H16-06-600 B2
21H16-08-600 B1
ALT
20H16-06-600 B1
21H16-01-600 B2
ALT
21H16-04-600 B2
21H16-02-600 B2
ALT
20H16-05-600 B2
21H16-02-600 B1
ALT
20H16-05-600 B1
21H16-03-600 B1
ALT
20H16-01-600 B1
SEE DRG 4511
E
SEE DRG 4506
4514
21H16-07-600 B1
SEE DRG 4526
21H16-01-600 B1
ALT
21H16-04-600 B1
21H16-03-600 B2
ALT
20H16-01-600 B2
21H16-03-600 B2
ALT
21H16-01-600 B2
21H16-03-600 B1
ALT
21H16-01-600 B1
SEE DRG 4504
SEE DRG 4505

S3 Bottom reinforcement

(Scale: 1 : 50)

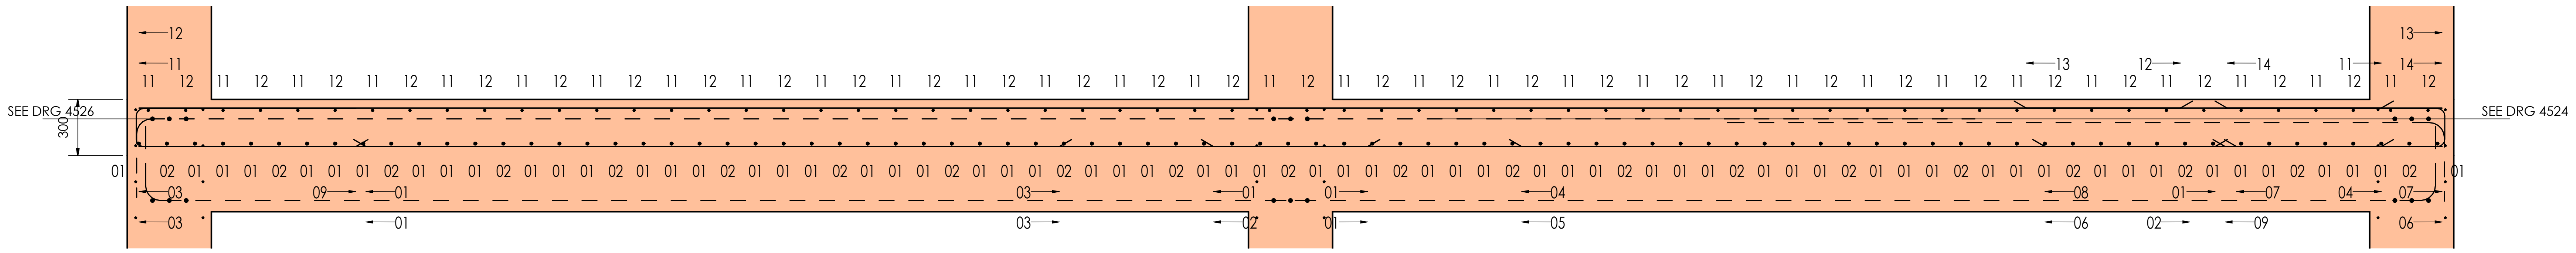
SEE DRG 4526
SEE DRG 4524
300
11
12
13
14
01
02
03
04
05
06
07
08
09

S3 Section E-E

(Scale: 1 : 25)

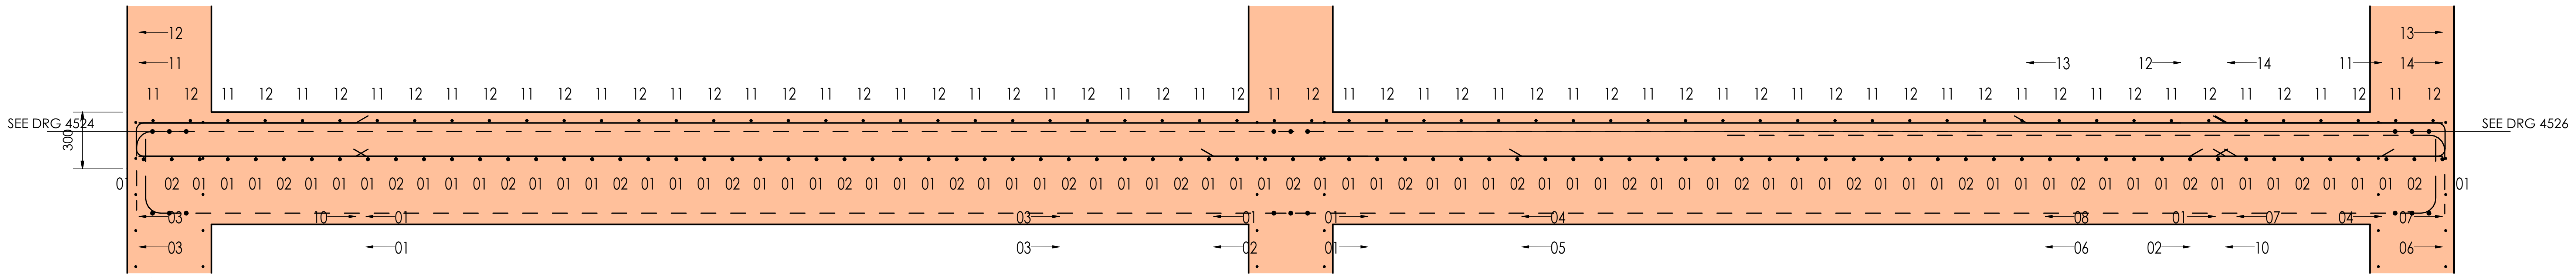
SEE DRG 4524
SEE DRG 4526
300
11
12
13
14
01
02
03
04
05
06
07
08
10

S3 Section F-F

(Scale: 1 : 25)

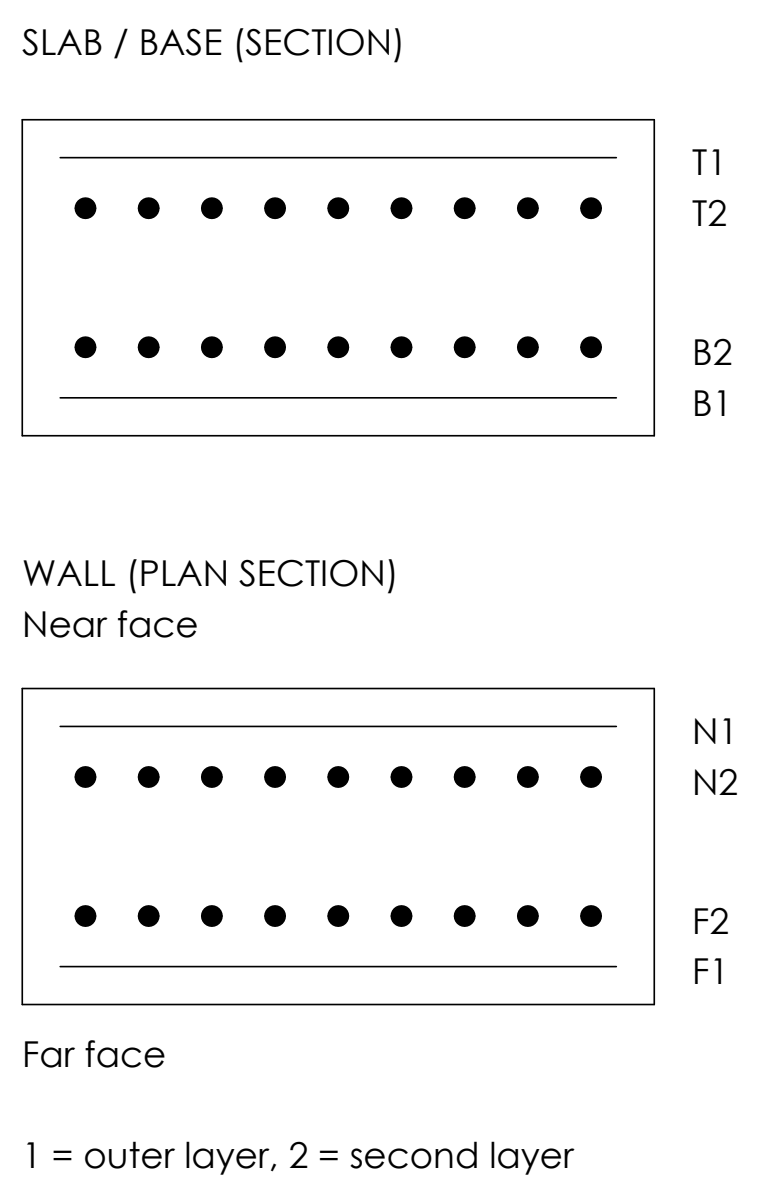
SLAB / BASE (SECTION)
T1
T2
B2
B1
WALL (PLAN SECTION)
Near face
N1
N2
F2
F1
Far face

1 = outer layer, 2 = second layer

RC layer notation

REINFORCEMENT NOTES

1. Read with the general arrangement drawings and the general notes (0900). Do not scale from this drawing.
2. Concrete: slabs C32/40.
3. Reinforcement: high yield ribbed bars B500B to BS 4449, scheduled to BS 8666:2020. Bar schedules: 4515-01.
4. Nominal cover c_nom to all reinforcement, links included (includes delta c_dev = 10): slabs 40.
5. Maximum aggregate size 20 mm.
6. Bar notation: number, type and size, mark, centres, layer, e.g. 20H16-63-150 B1; centres and layer not given for beams and columns. Link zones (13@100): 13 links at 100 centres.
7. Layers: T top, B bottom, N near face, F far face; 1 outer layer, 2 second layer (see the layer notation key). EF each face, EW each way, ES each side, STG staggered, ALT alternate, ABR alternate bar reversed, UB U-bars (SMDSC 4th ed. Appendix I).
8. Laps and anchorages to the table in the general notes (0900) unless dimensioned; laps of adjacent bars staggered unless shown otherwise.
9. Bars bent cold to BS 8666; none heated, welded or rebent on site without approval.
10. Construction joints, holes and cast-in items only as shown or agreed.
11. Reinforcement inspected before concreting; no bar substituted without approval.
12. Fixing: Slabs: bottom mat on spacers, top mat on chairs to BS 7973 chosen by the contractor (SMDSC 4th ed. 4.2.6); bars tied at alternate intersections, at every one along edges and round openings.
13. Typical details: TD S1 (MD S1) on drawing 4514 (after the SMDSC 4th ed. model details; confirm with design).

Rev.	Date	Description	Drawn by	Check by

NOSA Ltd.
Suite 9.1, 9th Floor, ICC
2A Main Street
Gibraltar, GX11 1AA
T: +350 20075000
M: +350 58008085 / +35057056000
e: info@nosa.gi

Client: Client X

Project Title: 1st Rock Street

Drawing Description: Slabs reinforcement - S3

Drawing status: Project Status

Scale:	Size:	Date:	Drawn by:	Revision:
As shown	ISO A1	26/10/26	Author	

Drawing Number:

Project Number		Originator		Functional Breakdown		Spatial Breakdown		Form identifier		Discipline		Number
12345	-	NOSA	-	ZZ	-	ZZZ	-	D	-	S	-	4514