
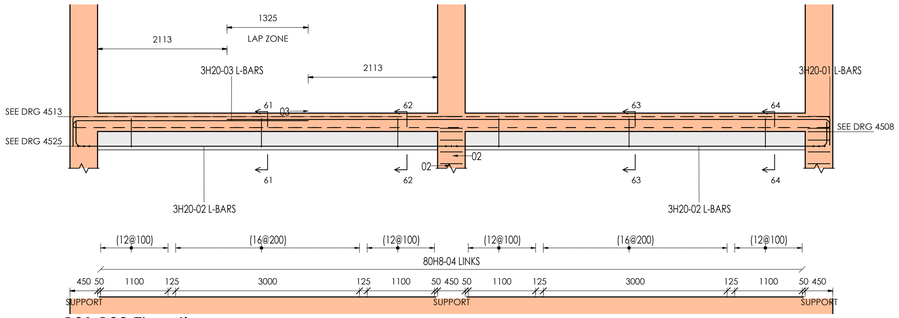



B31-B32 Elevation

(Scale: 1 : 50)

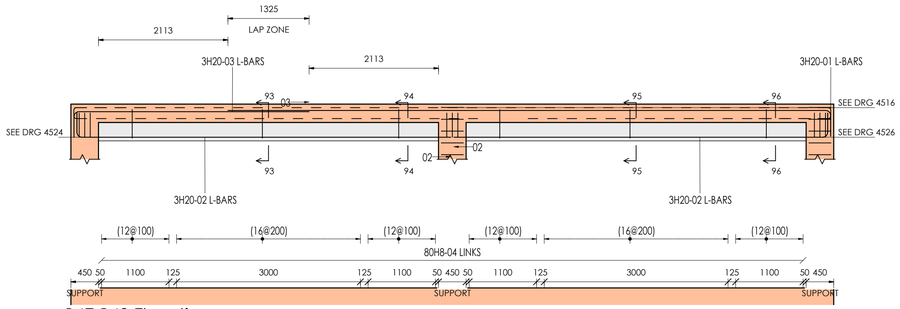


B47-B48 Elevation

(Scale: 1 : 50)




B31-B32 Section 61-61

(Scale: 1 : 20)




B31-B32 Section 62-62

(Scale: 1 : 20)




B31-B32 Section 63-63

(Scale: 1 : 20)




B47-B48 Section 93-93

(Scale: 1 : 20)




B47-B48 Section 94-94

(Scale: 1 : 20)




B47-B48 Section 95-95

(Scale: 1 : 20)




B31-B32 Section 64-64

(Scale: 1 : 20)




B47-B48 Section 96-96

(Scale: 1 : 20)

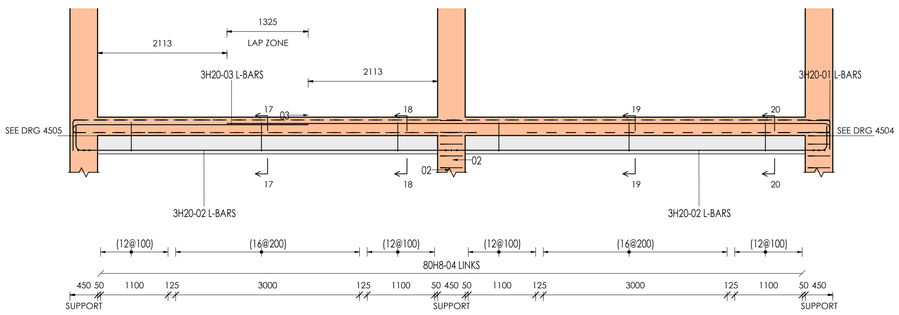


B9-B10 Elevation

(Scale: 1 : 50)

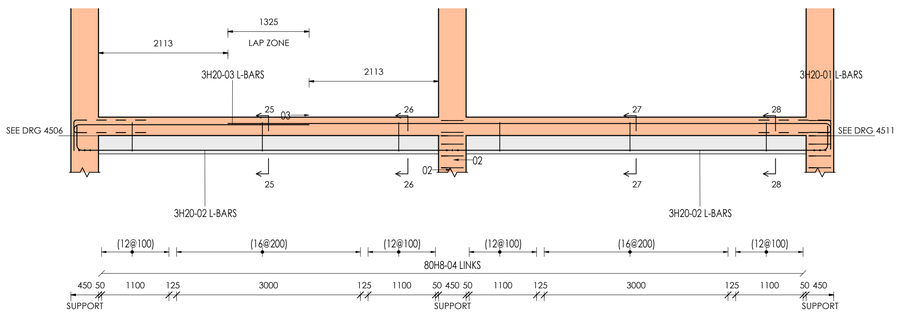


B13-B14 Elevation

(Scale: 1 : 50)




B9-B10 Section 17-17

(Scale: 1 : 20)




B9-B10 Section 18-18

(Scale: 1 : 20)




B9-B10 Section 19-19

(Scale: 1 : 20)




B13-B14 Section 25-25

(Scale: 1 : 20)




B13-B14 Section 26-26

(Scale: 1 : 20)




B13-B14 Section 27-27

(Scale: 1 : 20)



B9-B10 Section 20-20


(Scale: 1 : 20)




B13-B14 Section 28-28

(Scale: 1 : 20)

SLAB / BASE (SECTION)



WALL (PLAN SECTION)
Near face



Far face

1 = outer layer, 2 = second layer

RC layer notation

REINFORCEMENT NOTES

1. Read with the general arrangement drawings and the general notes (0900). Do not scale from this drawing.
2. Concrete: beams C32/40.
3. Reinforcement: high yield ribbed bars B500B to BS 4449, scheduled to BS 8666:2020. Bar schedules: 4529-01.
4. Nominal cover c_nom to all reinforcement, links included (includes delta c_dev = 10); beams 40.
5. Maximum aggregate size 20 mm.
6. Bar notation: number, type and size, mark, centres, layer, e.g. 20H16-63-150 B1; centres and layer not given for beams and columns. Link zones (13@100): 13 links at 100 centres.
7. Layers: T top, B bottom, N near face, F far face; 1 outer layer, 2 second layer (see the layer notation key). EF each face, EW each way, ES each side, STG staggered, ALT alternate, ABR alternate bar reversed, UB U-bars (SMDSC 4th ed. Appendix I).
8. Laps and anchorages to the table in the general notes (0900) unless dimensioned; laps of adjacent bars staggered unless shown otherwise.
9. Bars bent cold to BS 8666; none heated, welded or rebent on site without approval.
10. Construction joints, holes and cast-in items only as shown or agreed.
11. Reinforcement inspected before concreting; no bar substituted without approval.
12. Fixing: Beams: links tied to every corner bar and to alternate bars elsewhere; top bars carried on the links, bottom bars on spacers to BS 7973 at 1.0 m centres max. Cages may be prefabricated, lifting points by the contractor.

Rev.	Date	Description	Drawn by	Check by

NOSA Ltd.
Suite 9.1, 9th Floor, ICC
2A Main Street
Gibraltar, GX11 1AA
T: +350 20075900
M: +350 58008085 / +35057056000
e: info@nosa.gi

Client: Client X

Project Title: 1st Rock Street

Drawing Description: Beams reinforcement - B9-B10, B13-B14, B31-B32, B47-B48

Drawing status: Project Status

Scale:	Size:	Date:	Drawn by:	Revision:
As shown	ISO A1	26/10/26	Author	

Drawing Number:

Project Number	Originator	Functional Breakdown	Spatial Breakdown	Form Identifier	Discipline	Number
12345	NOSA	ZZ	ZZZ	D	S	4528