

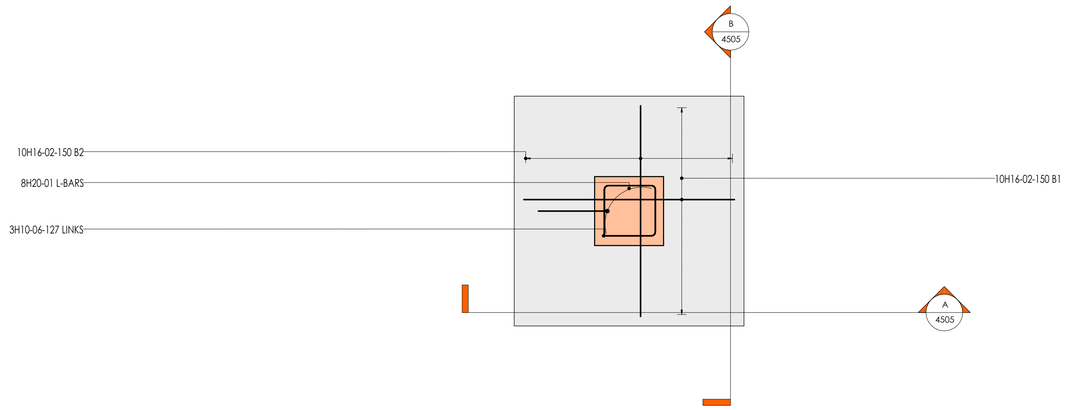


F10 Plan
(Scale: 1 : 20)

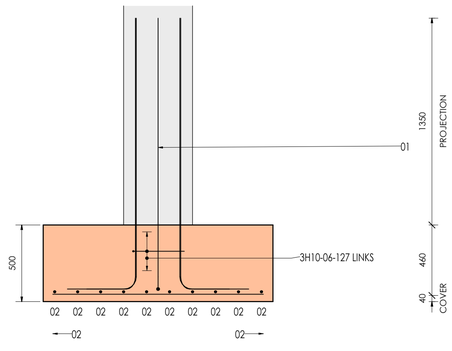


F10 Section A-A
(Scale: 1 : 20)

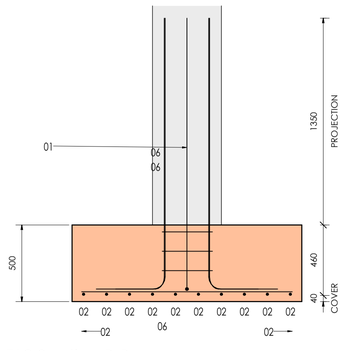

F10 Section B-B
(Scale: 1 : 20)

TYPICAL DETAIL C1 - COLUMN STARTERS AND KICKER

After SMDSC 4th ed. MD C1 / MD F1 - confirm with design

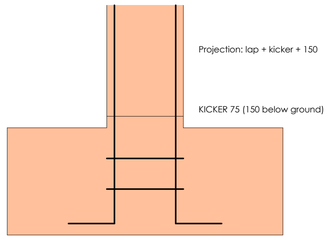


Starter links H10-300, 3 min., in the base
Starters fixed to a template before the pour

TD C1 - COLUMN STARTERS AND KICKER

TYPICAL DETAIL PC1 - PILE CAP


After SMDSC 4th ed. MD PC1 / 6.7 - confirm with design

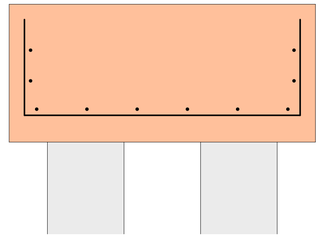


U-bars over the piles, 100 cover above the pile heads;
bars the other way above them; lacers round the legs
Piles cut off 75 into the cap (see the piling drawing)

TD PC1 - PILE CAP

SLAB / BASE (SECTION)



WALL (PLAN SECTION)
Near face



Far face

1 = outer layer, 2 = second layer

RC layer notation

REINFORCEMENT NOTES

1. Read with the general arrangement drawings 1000 series and the general notes (0900). Do not scale from this drawing.
2. Concrete: foundations C32/40.
3. Reinforcement: high yield ribbed bars B500B to BS 4449, scheduled to BS 8666:2020. Bar schedules: 4505-01.
4. Nominal cover c_nom to all reinforcement, links included (includes delta c_dev = 10): foundations 40.
5. Maximum aggregate size 20 mm.
6. Bar notation: number, type and size, mark, centres, layer, e.g. 20H16-63-150 B1; centres and layer not given for beams and columns. Link zones (13@100): 13 links at 100 centres.
7. Layers: T top, B bottom, N near face, F far face; 1 outer layer, 2 second layer (see the layer notation key). EF each face, EW each way, ES each side. STG staggered, ALT alternate, ABR alternate bar reversed, UB U-bars (SMDSC 4th ed. Appendix I).
8. Laps and anchorages to the table in the general notes (0900) unless dimensioned; laps of adjacent bars staggered unless shown otherwise.
9. Bars bent cold to BS 8666; none heated, welded or rebent on site without approval.
10. Construction joints, holes and cast-in items only as shown or agreed.
11. Reinforcement inspected before concreting; no bar substituted without approval.
12. Fixing: Foundations: bottom mat on 50 mm spacers on the blinding; starter bars fixed to a template; lacers tied to every bent-up leg. Multi-column bases and rafts: top mat on chairs and edge U-bars to BS 7973, sized for the pour sequence (SMDSC 4th ed. 6.7.2).
13. Buildability check: A (9)100; 0 error(s), 3 warning(s) - see the RC QA report.
14. Typical details: TD C1 (MD C1 / MD F1). TD PC1 (MD PC1 / 6.7) on drawing 4505 (after the SMDSC 4th ed. model details; confirm with design).

Rev.	Date	Description	Drawn by	Check by

NOSA Ltd.
Suite 9.1. 9th Floor, ICC
2A Main Street
Gibraltar, GX11 1AA
T: +350 20075000
M: +350 58008085 / +35057056000
e: info@nosa.gi

Client: Client X

Project Title: 1st Rock Street

Drawing Description: Foundations reinforcement - F10

Drawing status: Project Status

Scale:	Size:	Date:	Drawn by:	Revision:
As shown	ISO A1	10/18/26	Author	

Drawing Number:

Project Number	Originator	Functional Breakdown	Spatial Breakdown	Form identifier	Discipline	Number
12345	NOSA	-	-	-	-	4505